

CAB-O-SPERSE® DISPERSIONS FOR INK JET MEDIA AND PAPER COATINGS

Why CAB-O-SPERSE dispersions in paper media?

1. Improved and consistent performance:

- High absorptive capacity
- Fast drying characteristics
- Good substrate adhesion
- Excellent image quality and gloss


2. Processing ease:

- Pre-dispersed particles are simple to incorporate into water-based systems
- CAB-O-SPERSE products can be selected to maximize stability in formulation

3. High purity:

- Good chemical and temperature stability without yellowing
- Dispersant-free to minimize incompatibility and aid formulation flexibility


High surface area fumed metal oxide particles delivered by CAB-O-SPERSE dispersions enable rapid drying of inks. Coming pre-dispersed, they provide stable formulations and uniform dry porous coating layers. Drops of ink quickly wick into the surface layer, trapping the pigment.

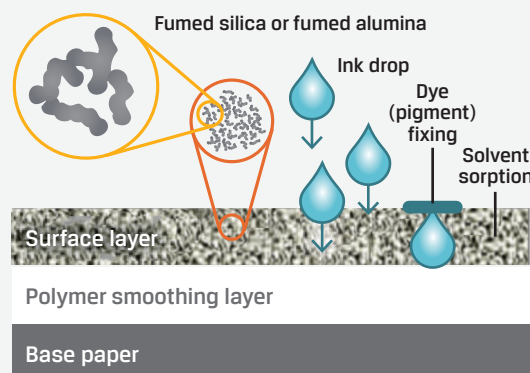


High Porosity Delivers Rapid Drying Times

CAB-O-SPERSE dispersions deliver high porosity in ink jet paper and film coatings. The high porosity provides rapid drying for printed ink images, reducing smudging significantly.

**Drying Time vs. Spot Color
(Alumina Dispersions)**

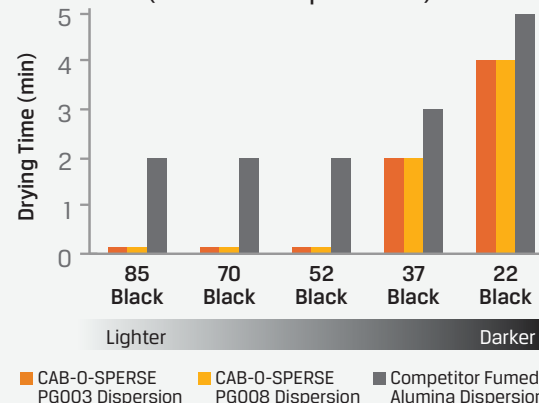

**Drying Time vs. Spot Color
(Silica Dispersions)**

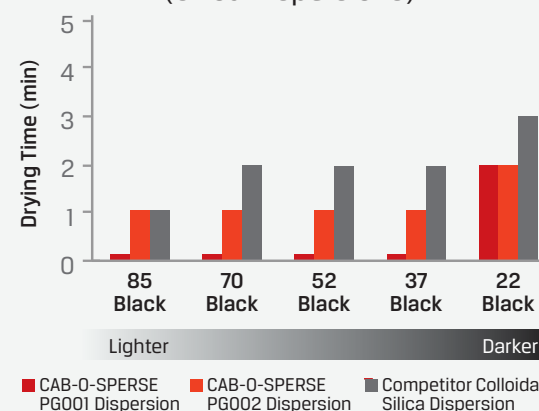


Note: Drying time refers to time required for printed black spot to resist smudging upon drying.

Improved Appearance and Image Quality


Higher gloss is desired for most photo media. CAB-O-SPERSE dispersions demonstrate that high porosity can yield high gloss finishes and rapid drying.

**Gloss
(Fumed Alumina Dispersions)**

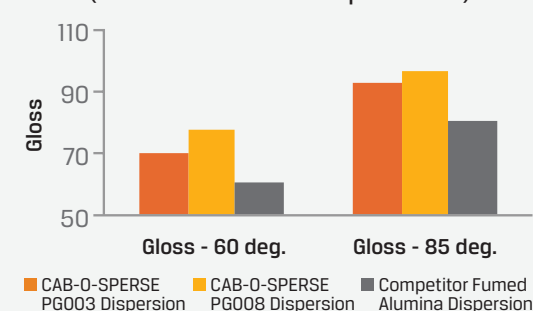

CAB-O-SPERSE fumed silica and fumed alumina dispersions offer a very high color gamut, resulting in print content with a broad range of color space.

Color Gamut of CAB-O-SPERSE Dispersions

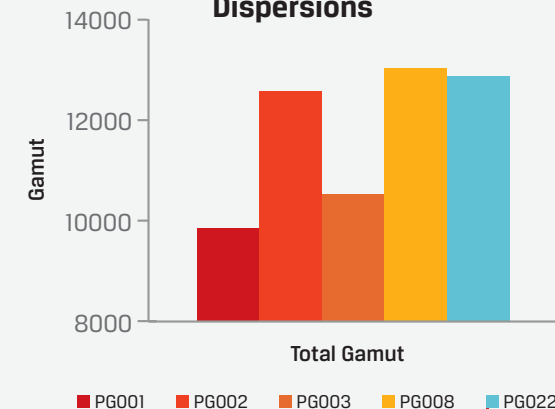

PERFORMANCE SUMMARY

Product	Application					Functionality						
	Premium glossy photo paper	Glossy paper / wide format glossy paper	Semi-gloss (satin) photo paper	Transparency back-lit film	Greeting cards/ specialty	Instant dry	Water fastness	Gloss	Transparency	Color gamut	High solids	Porosity
PG001	○	○	◐	○	○	●	○	○	○	◐	●	●
PG002	○	○	◐	◐	○	●	○	◐	◐	●	◐	●
PG003	●	●	○	◐	●	●	●	●	◐	◐	●	●
PG008	●	●	○	●	●	●	●	●	◐	●	●	●
PG022	◐	●	●	●	●	●	●	◐	●	●	◐	●

The different silica and alumina dispersion products enable a range of performance benefits across a variety of print media substrates

Performance recommendation: ○ Adequate ◐ Good ● Excellent

SAMPLE FORMULATION

Ingredients	Dry parts	Description
CAB-O-SPERSE dispersion	100	Fumed metal oxide dispersion
Polyvinyl alcohol	16.7	Low molecular weight
Polyvinyl pyrrolidone	4	Low molecular weight (15k-30k)
Surfactant	2	Wetting aid

To the left is a simple proxy ink jet media coating formulation. Most of the formulation is composed of particles, along with a small amount of binder (in this case, polyvinyl alcohol).

Recommended coating weights are 7-15 m²/g.

The performance summary above and performance data displayed on the other side of the page were generated using this type of formulation.

Other binders, such as polyvinyl acetates, or copolymers like ethylene vinyl acetate (EVAs), vinyl acetate ethylene (VAEs), and other styrene-acrylic copolymers may also be used. These more hydrophobic binders provide additional water fastness and rub resistance.

Additional cationic additives would add further pigment- or ink-trapping capabilities to the formulation.

PRODUCTS & PROPERTIES FOR PRINT MEDIA

Product	Material	CAB-O-SPERSE Dispersion properties			
		Specific surface area (m ² /g)	Surface charge	% wt.	pH
PG001	Silica	90	Anionic	30	10
PG002	Silica	200	Anionic	20	9.5
PG003	Alumina	51	Cationic	40	4
PG008	Alumina	81	Cationic	40	4
PG022	Silica	200	Cationic	20	3.7



cabotcorp.com
R02 3/14 ©2013-2014 Cabot Corporation



Cabot Sanmar Limited
9, Cathedral Road, Chennai 600 086, India
Tel: +91 44 2812 8500
Email: silica@sanmargroup.com

The CAB-O-SPERSE name is a registered trademark of Cabot Corporation.

This information is provided as a convenience and is for informational purposes only. This information may contain inaccuracies, errors or omissions. CABOT DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WARRANTIES FOR MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE AS TO (i) SUCH INFORMATION, (ii) ANY PRODUCT AND (iii) INTELLECTUAL PROPERTY INFRINGEMENT. In no event is Cabot responsible for, and Cabot does not accept and hereby disclaims liability for, any damages in connection with the use of or reliance on this information or any product to which it relates.