


XOMOX[®]

brands you trust.

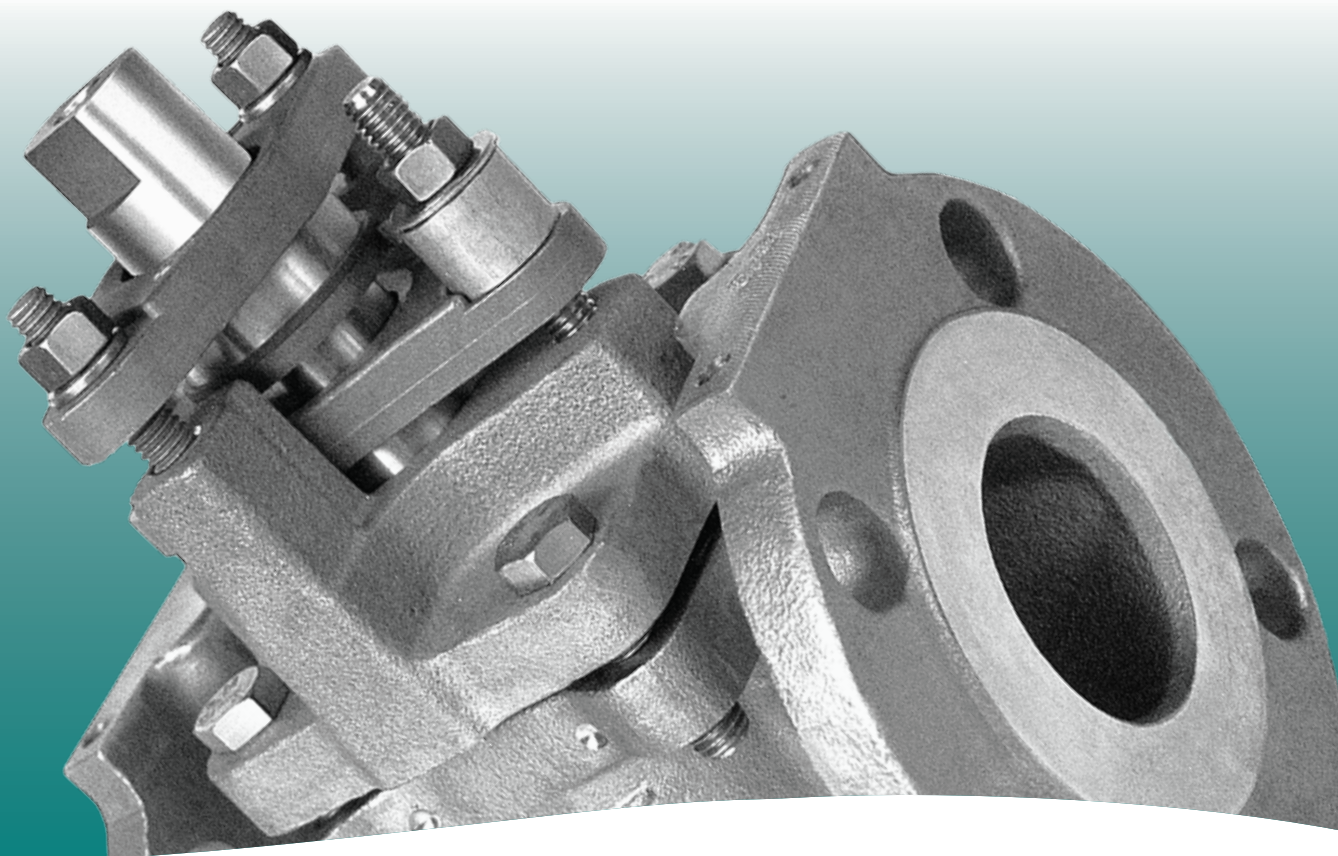

Tuflin[®] XP Sleeved Plug Valves

CRANE[®]

ChemPharma Flow Solutions

www.cranechempharma.com

Superior fugitive emissions control.

Tufline® XP® Sleeved Plug valves provide exceptional sealing to atmosphere.

The primary top seal is at the plug.

A secondary seal is provided by live loaded packing at the stem.

Thermal cycling emissions control.

Even with thermal cycling, the patented shrink-seal lip assures stem sealing that meets or exceeds the most stringent regulatory requirements.

This little lip assures better emissions control.

During thermal cycling, when fugitive emissions are most likely to escape, this Tufline exclusive and patented shrink-seal lip tightens the seal.

Longer-lasting in-line sealing.

The inert PTFE sleeve completely surrounds the plug. The sleeve provides a full-circumferential sealing surface from port to port. Open, closed, or rotating, the seal is assured.

Performance proven.

Tufline Sleeved Plug valves have proven themselves with decades of trouble-free emissions control service in thousands of applications. Only Tufline valves offer exclusive emissions control attributes that are designed in, not added on.

A family of emissions control valves.

Tufline XP valves are part of a broad line of emissions control valves designed for a variety of applications and differing levels of emissions control requirements. Choose the Tufline valves that most economically meet your emissions control requirements.


Cost control.


Tufline valves pay for themselves many times over with lower maintenance, longer service life, and greater operating reliability.

Calculate the low long-term cost of these reliable valves and see how much they can save in your application.


More options.

- ANSI Classes 150, 300, or 600.
- Flanged, screwed, or weld ends.
- Fire tested to API 607, 4th Edition.
- Multiport configurations available.
- Monitoring port available.

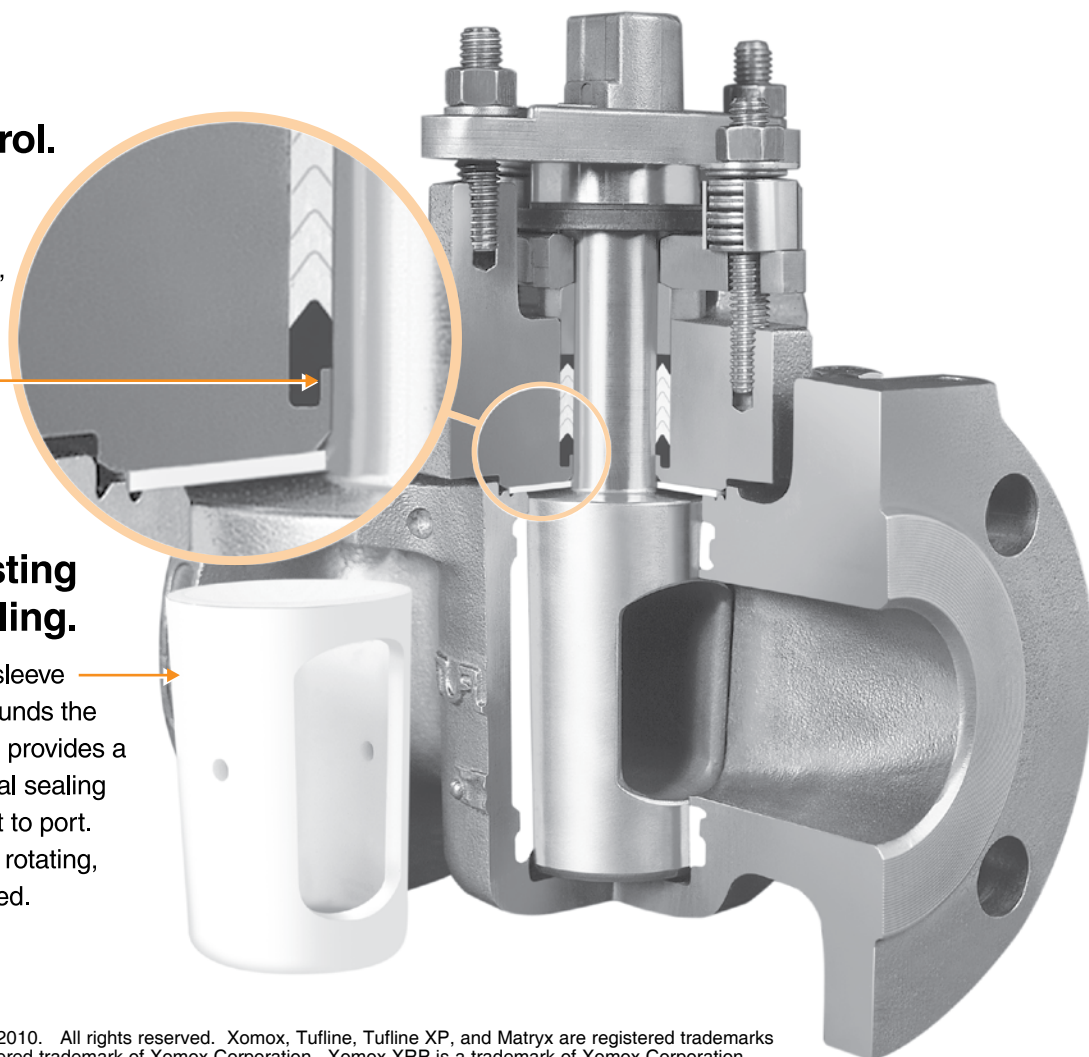

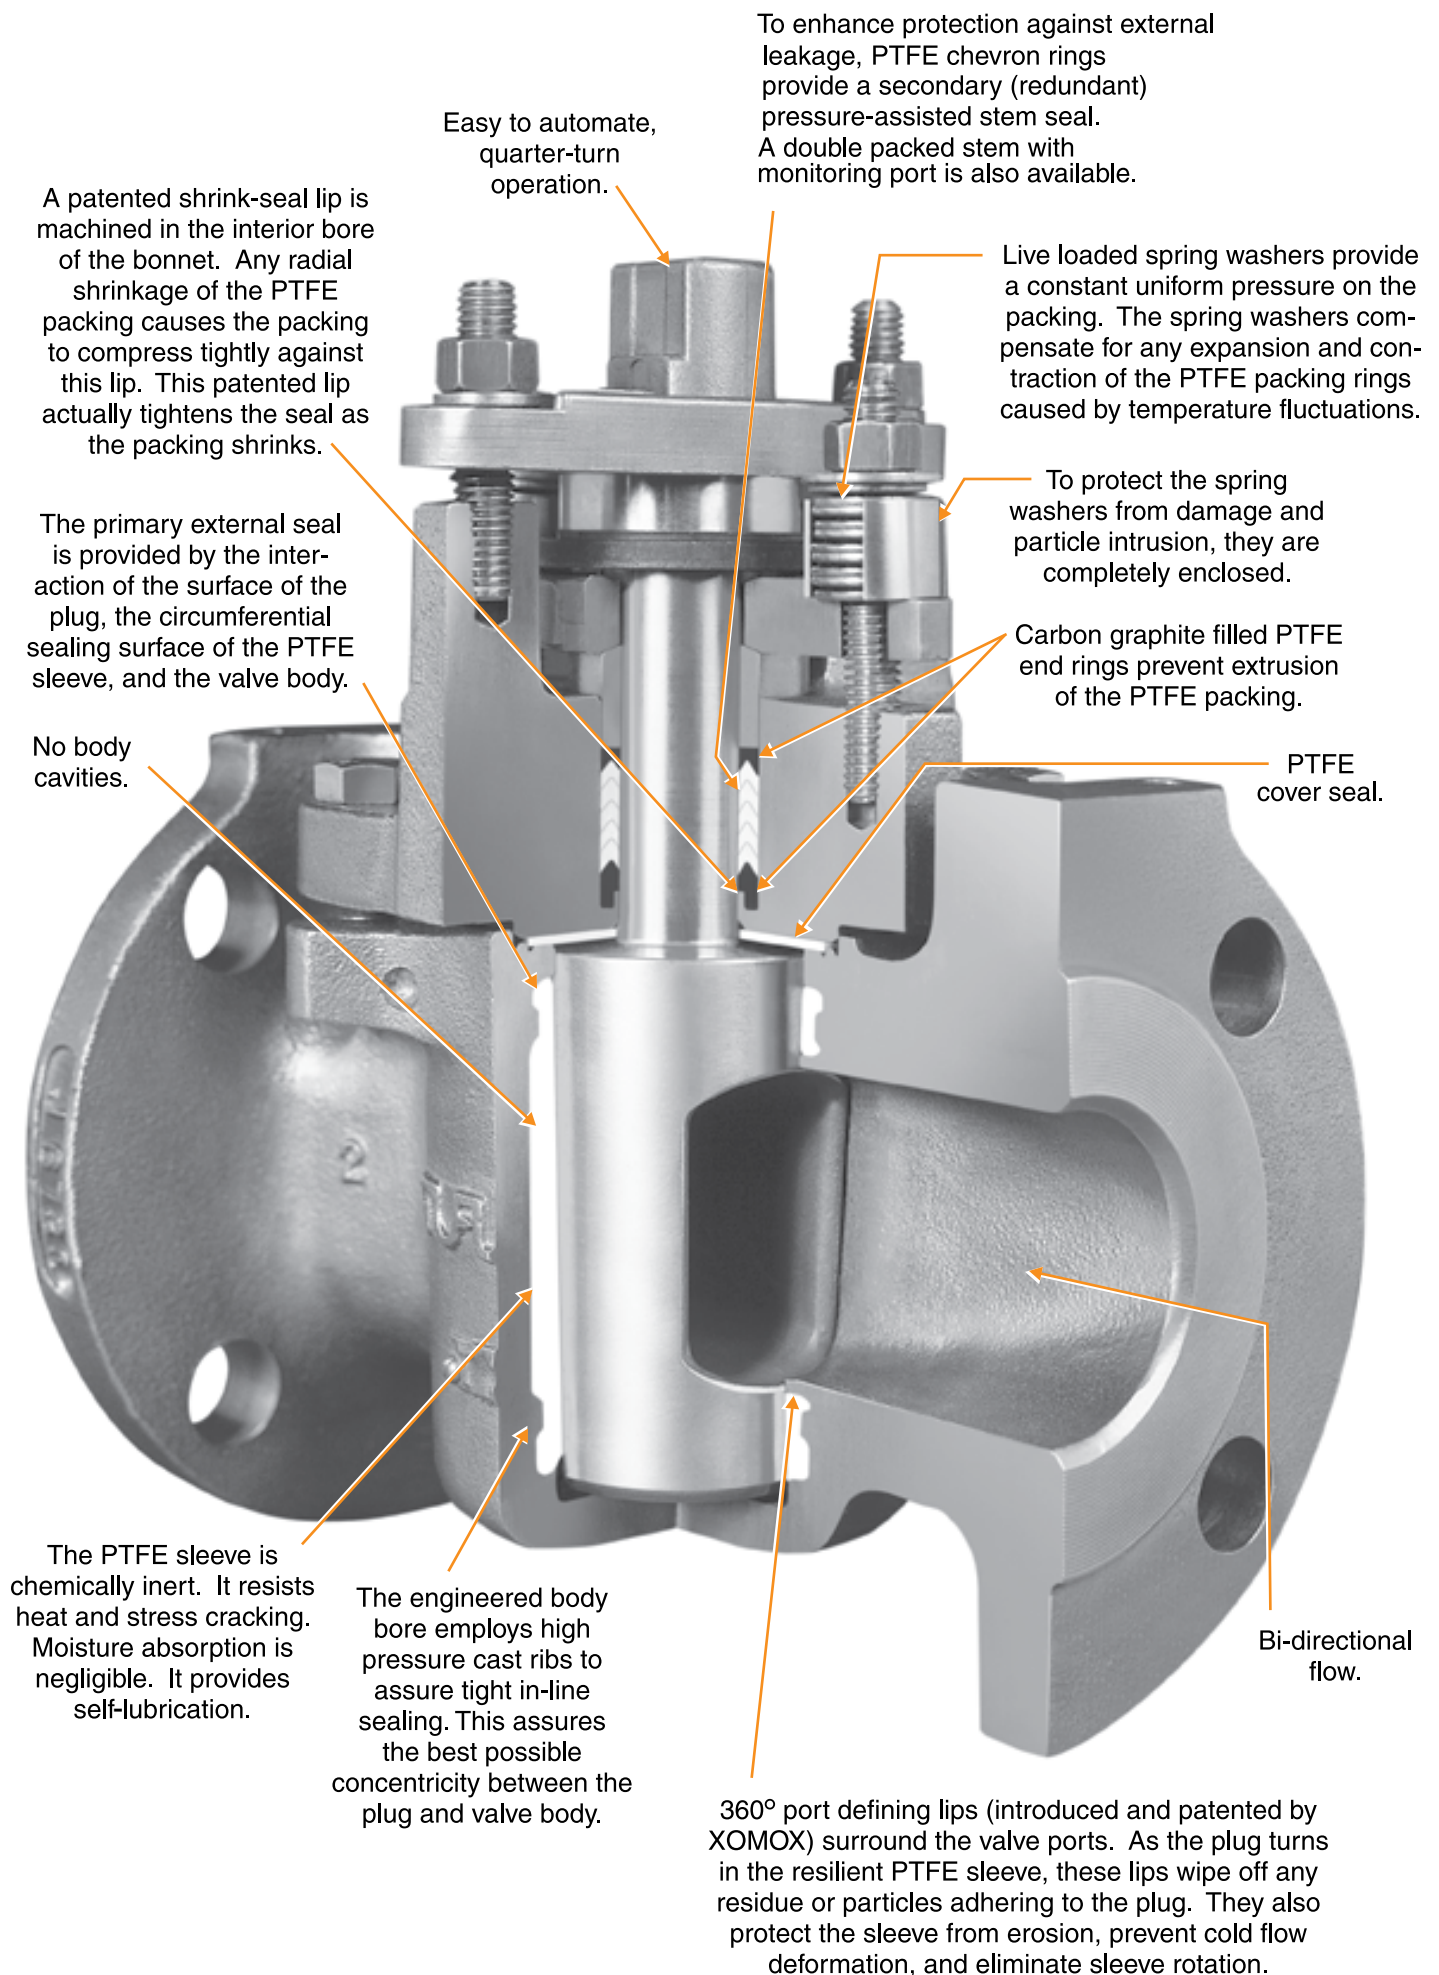

Flanged End Dimensions.

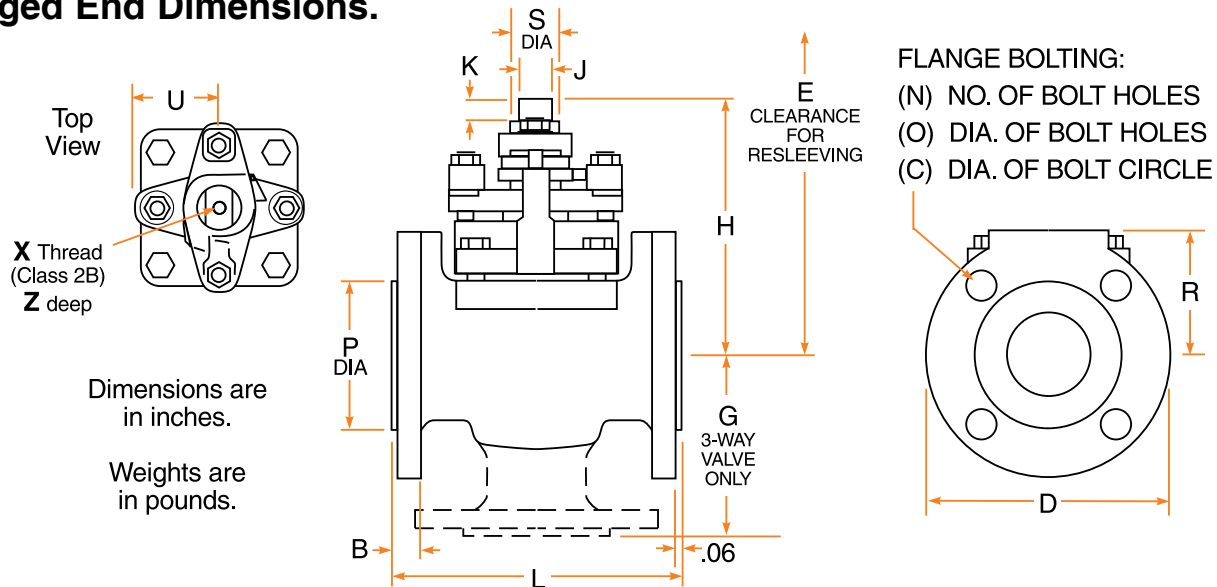

Class 150 . . . **2-Way:** Figure No. 067XP . . . **3-Way:** Figure No. 037XP

Size	L	H	D	B	P	R	N	O	C	S	J	K	E	U	X	Z	G 3-Way	Weight 2-Way	Weight 3-Way
1/2	4.25	4.83	3.50	.38	1.38	1.75	4	.63	2.38	.61	.438	.50	7.00	1.50	1/4-20	.53	2.75	4	5
3/4	4.63	4.83	3.88	.41	1.69	1.94	4	.63	2.75	.61	.438	.50	7.00	1.50	1/4-20	.53	2.88	5	6.2
1	5.00	5.25	4.25	.44	2.00	2.13	4	.63	3.13	.63	.438	.50	8.50	1.50	1/4-20	.53	3.50	9	11.5
1 1/2	6.50	5.94	5.00	.56	2.88	2.50	4	.63	3.88	.88	.563	.63	9.25	1.84	5/16-18	.59	4.13	17	21
2	7.00	6.38	6.00	.63	3.63	3.00	4	.75	4.75	1.13	.750	.63	9.88	2.13	5/16-18	.59	4.50	26	32
2 1/2†	8.00	6.94	7.50	.75	4.13	3.75	4	.75	5.50	1.13	.750	.63	10.38	2.13	5/16-18	.59	5.13	41	52
3	8.00	6.94	7.50	.75	5.00	3.75	4	.75	6.00	1.13	.750	.63	10.38	2.13	5/16-18	.59	5.13	41	52
4	9.00	8.94	9.00	.94	6.19	4.63	8	.75	7.50	1.25	.875	.88	22.00	3.00	5/16-18	.59	6.00	70	85
6	10.50	10.81	11.00	1.00	8.50	5.50	8	.88	9.50	2.00	1.398	1.00	25.00	3.44	5/16-18	.59	7.50	123	147
8	11.50	12.60	13.50	1.13	10.63	6.75	8	.88*	11.75	2.00	1.398	1.00	28.00	4.38	---	---	9.00	200	239

Class 300 . . . **2-Way:** Figure No. 0367XP . . . **3-Way:** Figure No. 0337XP


Size	L	H	D	B	P	R	N	O	C	S	J	K	E	U	X	Z	G 3-Way	Weight 2-Way	Weight 3-Way
1/2	5.50	4.83	3.75	.56	1.38	1.88	4	.63	2.63	.61	.438	.50	7.00	1.50	1/4-20	.53	2.88	7.2	9.2
3/4	6.00	4.83	4.63	.63	1.69	2.31	4	.75	3.25	.61	.438	.50	7.00	1.50	1/4-20	.53	3.00	10.7	13.7
1	6.50	5.25	4.88	.69	2.00	2.44	4	.75	3.50	.63	.438	.50	8.50	1.50	1/4-20	.53	3.75	13.5	17.5
1 1/2	7.50	5.94	6.13	.81	2.88	3.06	4	.88	4.50	.88	.563	.63	9.25	1.84	5/16-18	.59	4.38	25	33
2	8.50	6.38	6.50	.88	3.63	3.25	8	.75	5.00	1.13	.750	.63	9.88	2.13	5/16-18	.59	4.75	34	43
2 1/2†	11.13	6.94	8.25	1.13	4.13	4.13	8	.88	5.88	1.13	.750	.63	10.38	2.13	5/16-18	.59	5.56	48	63
3	11.13	6.94	8.25	1.13	5.00	4.13	8	.88	6.63	1.13	.750	.63	10.38	2.13	5/16-18	.59	5.56	48	63
4	12.00	8.94	10.00	1.25	6.19	5.13	8	.88	7.88	1.25	.875	.88	22.00	3.00	5/16-18	.59	6.75	96	121
6	15.88	10.81	12.50	1.44	8.50	6.25	12	.88	10.63	2.00	1.398	1.00	25.00	3.44	5/16-18	.59	8.50	193	235
8	16.50	12.60	15.00	1.63	10.63	7.50	12	100	13.00	2.00	1.398	1.00	28.00	4.38	---	---	10.00	292	359

† 2 1/2-inch valves are machined from 3-inch castings, but the flanges are machined to 2 1/2-inch dimensions.

* On Class 150, 8-inch valves, the two top holes in the flanges are tapped for 3/4-10UNC-2B threads.

** On 8-inch valves, cover bolts are arranged around a 7.63 dia. bolt circle.

Screwed End Dimensions.

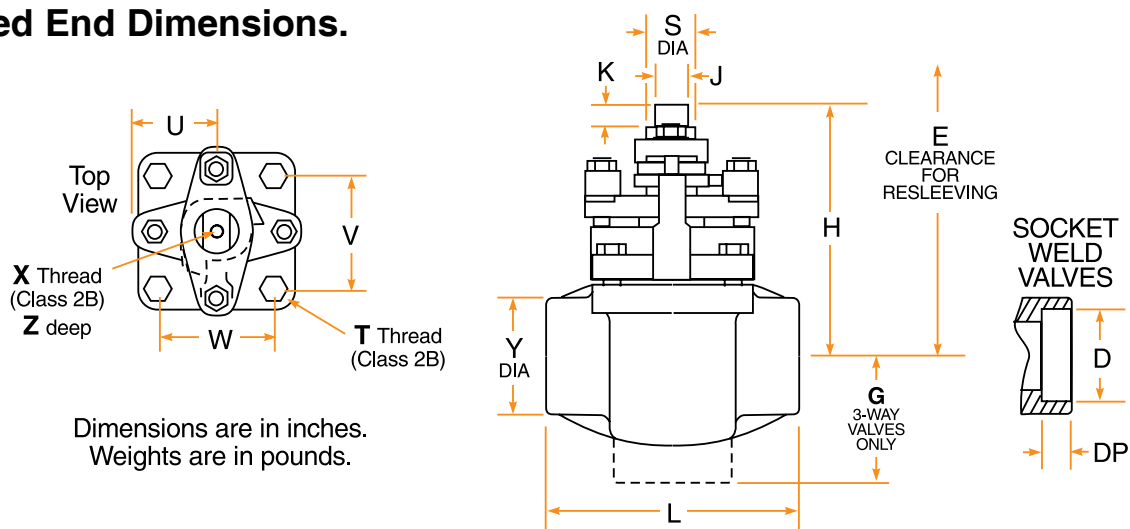


Class 150 . . . **2-Way:** Figure No. 066XP . . . **3-Way:** Figure No. 036XP

Class 300 . . . **2-Way:** Figure No. 0366XP . . . **3-Way:** Figure No. 0336XP

Socket Weld

Size	L	H	Y	S	J	K	E	T	U	V	W	X	Z	G 3-Way	Weight 2-Way	Weight 3-Way
1/2	3.25	4.83	1.68	.61	.438	.50	7.00	5/16-18	1.50	1.68	1.43	1/4-20	.53	1.69	2.7	3.0
3/4	3.25	4.83	1.68	.61	.438	.50	7.00	5/16-18	1.50	1.68	1.43	1/4-20	.53	1.80	3.2	3.5
1	4.63	5.25	2.21	.63	.438	.50	8.50	3/8-16	1.50	1.90	2.21	1/4-20	.53	2.38	6.5	7.5
1 1/2	5.50	5.94	2.33	.88	.563	.63	9.25	3/8-16	1.84	2.33	2.33	5/16-18	.59	2.88	14	15
2	6.50	6.38	3.02	1.13	.750	.63	9.88	7/16-14	2.13	3.02	3.02	5/16-18	.59	3.38	20	22

Size	D	DP
1/2	.860	.38
3/4	1.070	.50
1	1.335	.50
1 1/2	1.920	.50
2	2.411	.63

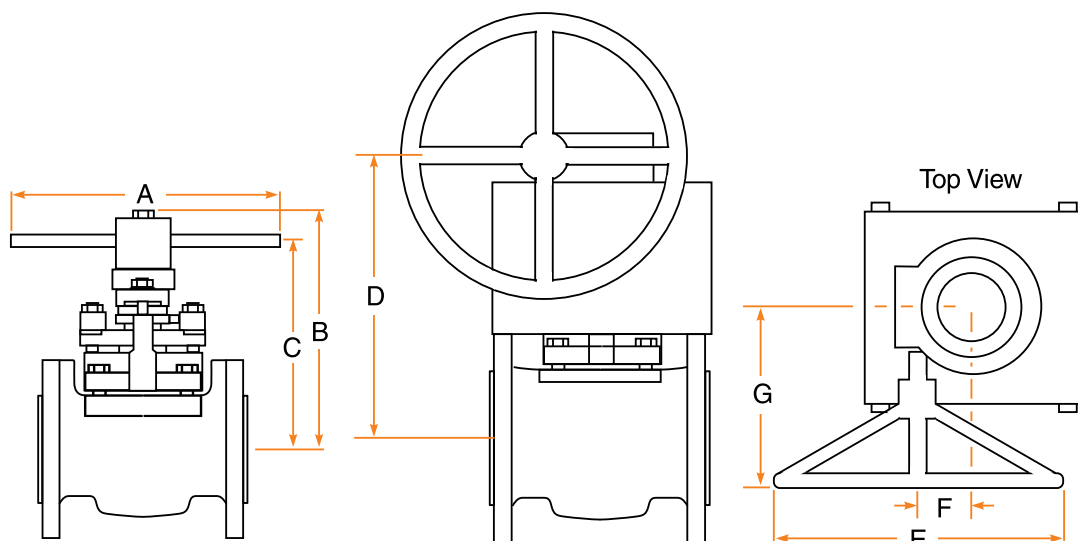

Wrench & 90° Enclosed Gear Operator Dimensions



These operator dimensions apply to all flange types and all multi-port valves.

Size	A	B	C
1/2	8.75	6.56	5.50
3/4	8.75	6.56	5.50
1	8.75	6.56	5.60
1 1/2	12.50	7.54	6.50
2	18.00	8.00	6.91
2 1/2	24.00	8.54	7.50
3	24.00	8.54	7.50

Size	D	E	F	G
4	12.63	18.00	2.63	10.50
6	14.88	24.00	3.38	12.75
8	16.63	30.00	4.38	15.38

More information.

The full Tufline Sleeved Plug valve catalog outlines many additional unique design features of the Tufline Sleeved Plug valve.

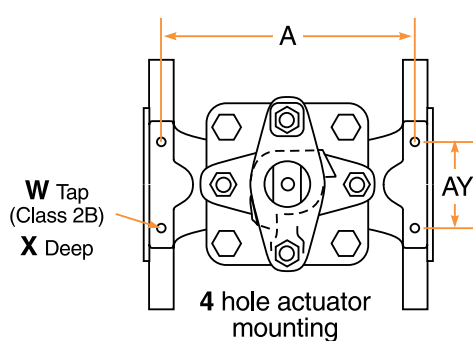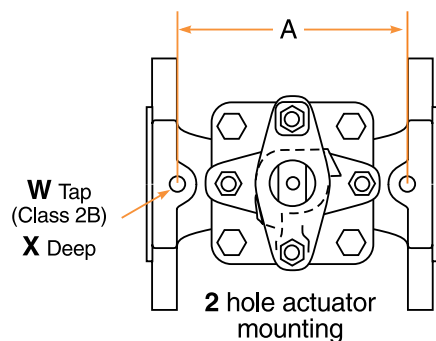

Actuator mounting hole configurations.

Full dimensions for valve and actuator assemblies are available.

Class 150

	4 Hole Pattern				2 Hole Pattern		
Size	A	AY	W	X	A	W	X
1/2	---	---	---	---	3.62	5/16 - 18	.47
3/4	---	---	---	---	3.75	5/16 - 18	.47
1	4.19	1.75	5/16 - 18	.38	---	---	---
1 1/2	5.75	1.75	5/16 - 18	.47	---	---	---
2	6.31	2.25	5/16 - 18	.47	---	---	---
2 1/2	7.13	3.50	3/8 - 16	.56	---	---	---
3	7.13	3.50	3/8 - 16	.56	---	---	---
4	8.00	4.00	7/16 - 14	.63	---	---	---
6	9.44	4.00	7/16 - 14	.63	---	---	---
8	10.19	6.00	1/2 - 13	.63	---	---	---

Class 300

	4 Hole Pattern				2 Hole Pattern		
Size	A	AY	W	X	A	W	X
1/2	---	---	---	---	4.38	5/16 - 18	.47
3/4	---	---	---	---	4.38	5/16 - 18	.47
1	5.75	1.75	5/16 - 18	.38	---	---	---
1 1/2	6.63	1.75	5/16 - 18	.47	---	---	---
2	7.56	2.25	5/16 - 18	.47	---	---	---
2 1/2	9.94	3.50	3/8 - 16	.56	---	---	---
3	9.94	3.50	3/8 - 16	.56	---	---	---
4	10.69	4.00	7/16 - 14	.63	---	---	---
6	14.00	4.00	7/16 - 14	.63	---	---	---
8	14.63	6.00	1/2 - 13	.63	---	---	---

Cv factors for valve sizing.

Class 150 & 300

Size	2-Way	3-Way A,AX,C pos.	3-Way D pos. 0° & 180°	3-Way D pos. 90°
1/2	9	7	4	5
3/4	9	7	4	5
1	43	20	11	17
1 1/2	89	40	21	37
2	172	70	40	47
2 1/2	294	100	54	87
3	294	100	54	87
4	548	175	94	159
6	1075	350	210	255
8	1591	475	360	450

Operating torques. (Inch-Pounds)

Figures are for 2-Way valves with PTFE sleeves.

Consult factory for torque adjustment factors for other sleeve materials.

Class 150 & 300

Size	Break torque	Seating torque	Running torque
1/2	154	88	77
3/4	154	88	77
1	440	275	220
1 1/2	880	550	440
2	1210	715	605
2 1/2	1320	770	660
3	1320	770	660
4	2640	1595	1320
6	5500	3300	2750
8	8580	5170	4290

Pressure-temperature ratings.

The useful range . . .

PTFE sleeve: -20°F to +400°F


Tufline-475 sleeve: -20°F to +475°F

Tufline-600 sleeve: -20°F to +600°F

. . . all with a maximum
temperature variation of 200°F.

Applications beyond these ranges
can be handled effectively but may
require valve adjustments at the
operating temperature or use of
alternate sleeve materials.

Material selections are
governed by the limits imposed
by ASME B16.34, 2004 edition.

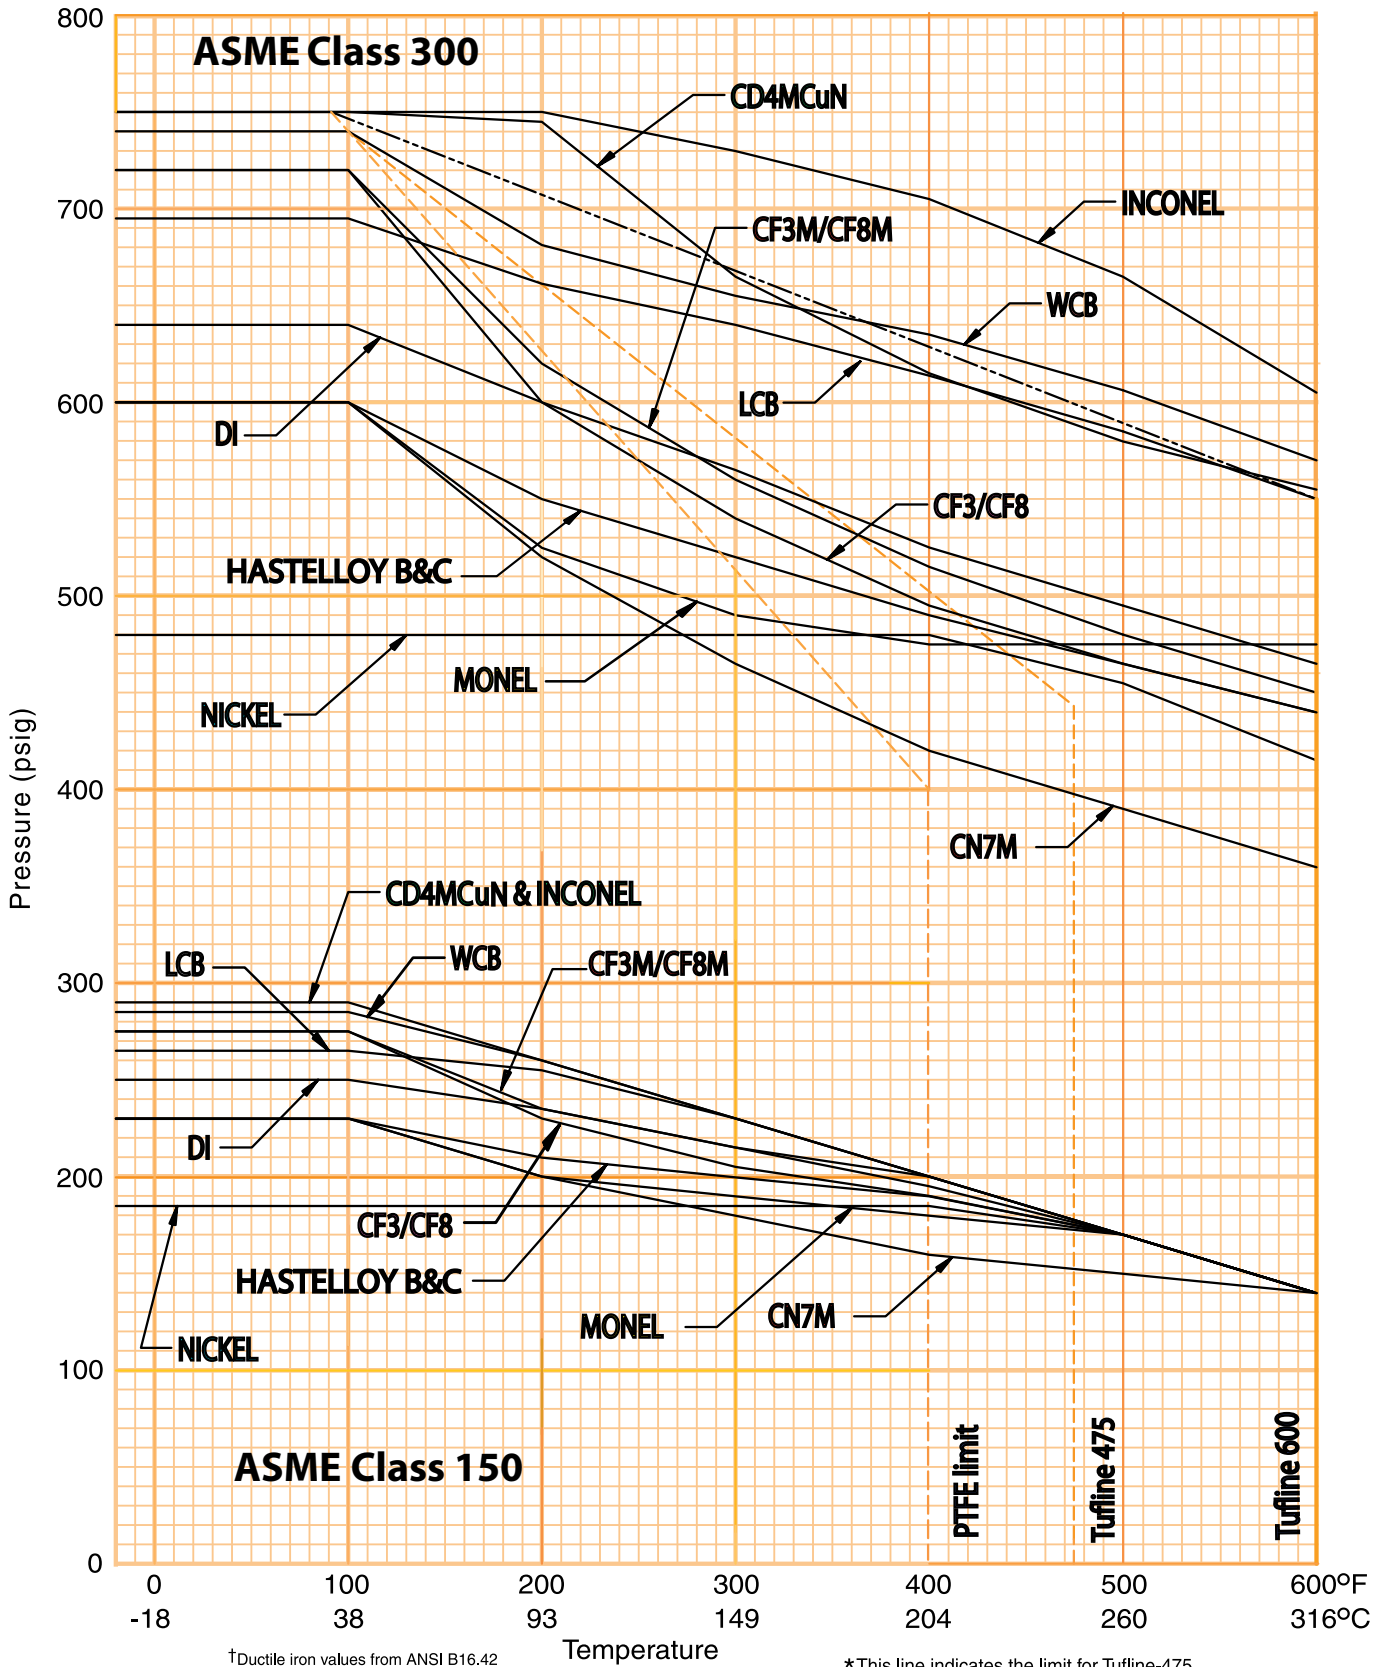



Xomox Rack & Pinion (XRP) Actuators and Matryx® Actuators.

Tufline automated valve packages assure you of single-source responsibility for flow control equipment.

With the Crane ChemPharma, Xomox family of valves, actuators, control accessories, and Xomox problem solving expertise, you are assured of valve packages that will provide optimum performance in your application.

Xomox Automation & Service Centers.

Xomox Automation & Service Centers are strategically located to provide comprehensive:

- Automated valve packaging.
- Valve modification.
- Valve repair.
- Application counseling.

For more information, fast response, comprehensive service, and knowledgeable technical help, call your nearest Xomox Automation & Service Center.

The Xomox Special Products Group.

The Xomox Special Products Group custom-designs, manufactures, and modifies valves.

Xomox Special Products valves are used in unusual, complex, or especially difficult applications.

Processors find that investing in these special valves pays off with greatly extended service life, improved overall operating efficiency, and reduced maintenance requirements.

Multiport valves.

Tufline XP Multiport Sleeved Plug valves bring economy and more compact system design to thousands of applications.












These valves are available through the Xomox Special Products Group.

Bi-directional flow for more flexibility.

In the diagrams the color indicates the path of fluid flow. Bi-directional flow permits more system design options.


3-way arrangements.

Only the Type A plug will shut off the flow. With the Type AX, C, and D plugs, there is always flow between the bottom port and one of the side ports.


		0° position	90° position	180° position
Type A				
Type AX				
Type C				
Type C pos. 1&2 only				
Type C pos. 2&3 only				
Type D				
Type D pos. 1&2 only				
Type D pos. 2&3 only				

Quick Reference Selection Table.

No. of Ports	Type	ANSI Class	Size Range	Operator	Figure Number	Additional Information
2	Screwed End	150	$\frac{1}{2}$ - 2	Wrench	066XP	2-Way Tufline Sleeved Plug valves provide tight shutoff from high vacuum through rated pressure at temperatures from -20°F to 600°F.
		300			0366XP	
	Flanged End	150	$\frac{1}{2}$ - 4	Enclosed Gear	067XP	
					067XP G	
		300	$\frac{1}{2}$ - 4	Wrench	0367XP	
					0367XP G	
3	Screwed End	150	$\frac{1}{2}$ - 2	Wrench	036XP	When ordering 3-Way valves, be sure to include the port configuration. Refer to page 9.
		300			0336XP	
	Flanged End	150	$\frac{1}{2}$ - 4	Enclosed Gear	037XP	
					037XP G	
		300	$\frac{1}{2}$ - 4	Wrench	0337XP	
					0337XP G	

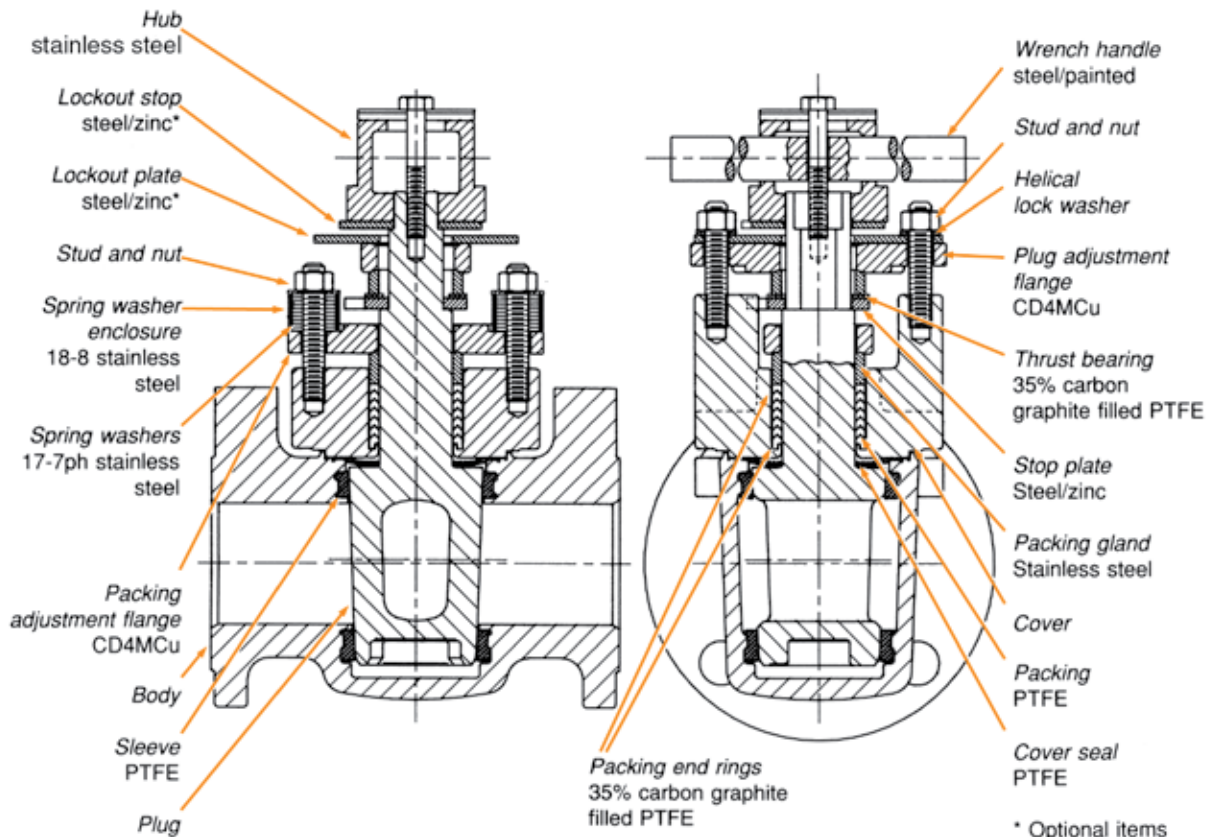

How to order

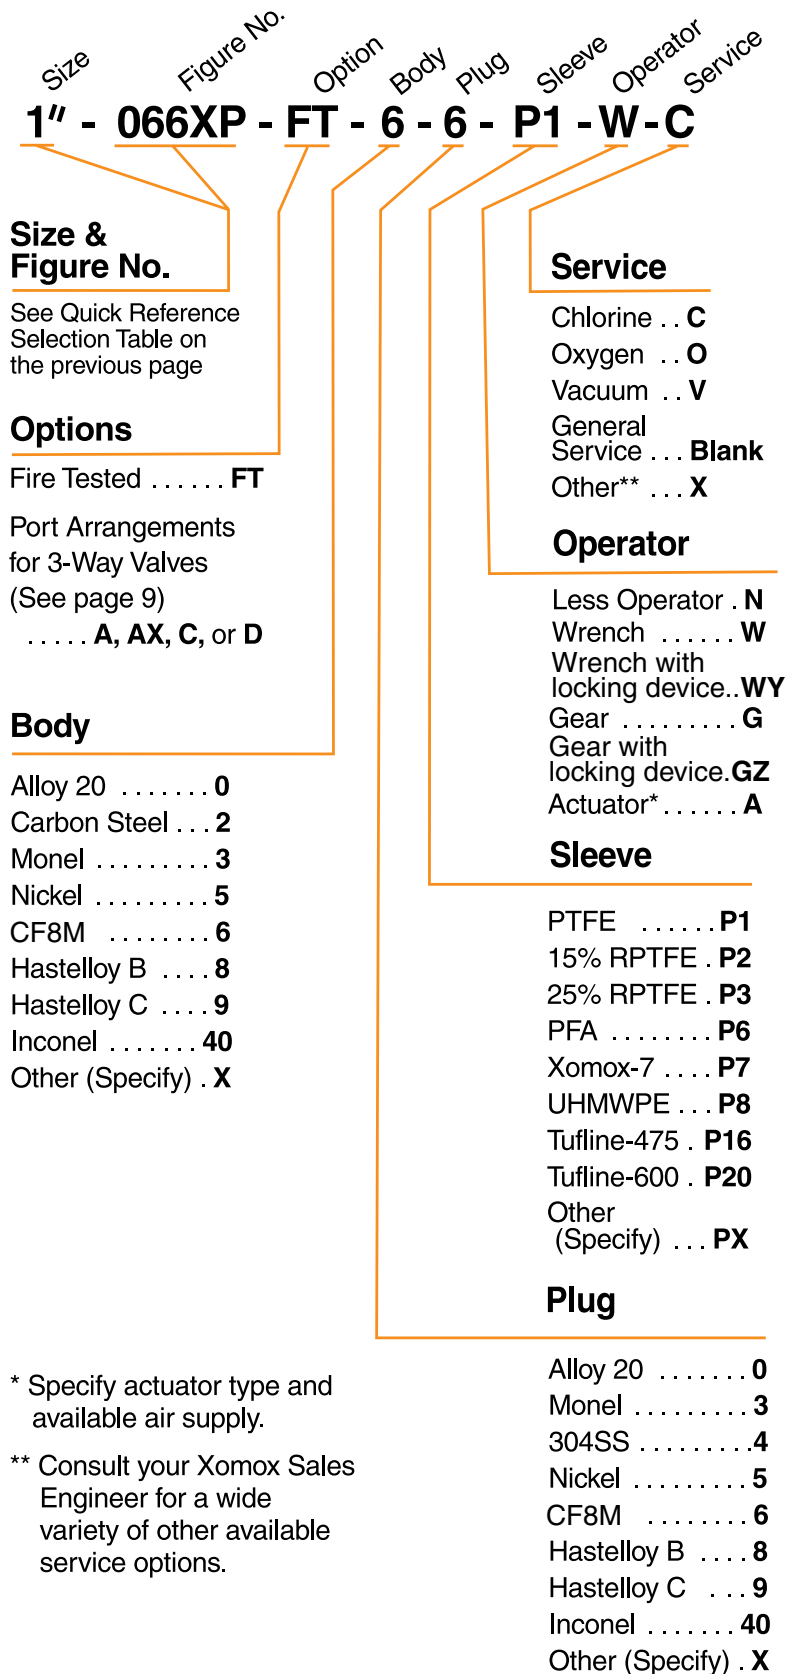



CRANE ChemPharma Flow Solutions™

XOMOX Headquarters
4444 Cooper Road,
Cincinnati, OH 45242, U.S.A.
Tel.: (513) 745-6000
Fax: (513) 745-6086

XOMOX International GmbH & Co.
Von-Behring-Straße 15,
D-88131 Lindau/Bodensee
Tel.: (49) 8382-702-0
Fax: (49) 8382-702-144

CRANE

ChemPharma Flow Solutions



CRANE ChemPharma Flow solutions Include: Pipe - Valves - Fitting - Actuators - Pumps

DEPA®

PSI
LINE PIPE SYSTEMS

ResistoPure

Saunders®
the science inside

ELRO®

RESISTOFLEX®



XOMOX®

CP-XOMOX-XPSV-BU-EN-CI-1/10-PN329203

Crane Co., and its subsidiaries cannot accept responsibility for possible errors in catalogues, brochures, other printed materials, and website information. Crane Co. reserves the right to alter its products without notice, including products already on order provided that such alteration can be made without changes being necessary in specifications already agreed. All their trademarks in this material are property of the Crane Co. or its subsidiaries. The Crane and Crane brands logotype (Xomox®, Saunders®, Resistoflex®, Resistopure™, PSI®, DEPA®, ELRO®, REVO®) are registered trademarks of Crane Co. All rights reserved.